



OWNERS MANUAL

03.07.25

- ✓ High quality, efficient and energy saving
- ✓ Industry leading technology and innovation

ECON-215FREC-W



The ECONOVA[®] ECON-215FREC-W Contents

The water heater must be maintained in accordance with the Owner's Guide and Installation.

Care must be taken to ensure the system is installed in accordance to AS/NZS 2712 and must comply with A60335.2.40:2019 - Household and similar electrical appliances.

The installation conforms to the Plumbing Code of Australia (PCA). regulations of the local authority. in line with national building regulations and local occupational health and safety regulations

Thank you for choosing one of the world's most energy efficient Heat Pump Water Heaters. Designed and developed in Australia for Australian conditions, and a Smart sustainable future..



The ECON-215FREC-W uses the natural refrigerant R 290, which absorbs heat energy more efficiently for a cleaner environment. R290 (propane) is NOT a proscribed refrigerant. R290 is a flammable gas and the following instructions must be observed.

Section	Content	Page
1	Warning & Safety Information	3
2	Installation cautions	4
3	Pre-installation	5
4	Installation	7
5	Operation	8
6	System maintenance	9
7	Specifications & drawings	10
8	Electrical & Controls	13
9	Warranty	18

INSTALLERS NOTE; All ECONOVA models featured in this manual are mains powered, electrical safety protection Class I, IPX4 rated for ingress protection, uses flammable refrigerant R290, fixed appliance requiring fixed connection to mains through an RCBO. The units must be installed by qualified and trained professionals according to local regulations for plumbing and electrical safety. Within this manual are instructions required by the safety standards AS/NZS 60335.2.40:2023 and AS/NZS 60335.1:2020+A1 applicable to heat pumps included in the manuals.

1.Warning & Safety Information

WARNING – FOR CONTINUED SAFETY OF THIS APPLIANCE IT MUST BE INSTALLED, OPERATED AND MAINTAINED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.

WARNING-THIS APPLIANCE MAY DELIVER WATER AT HIGH TEMPERATURE. REFER TO THE PLUMBING CODE OF AUSTRALIA (PCA), LOCAL REQUIREMENTS AND INSTALLATION INSTRUCTIONS TO DETERMINE IF ADDITIONAL DELIVERY TEMPERATURE CONTROL IS REQUIRED.

WARNING

- If the hot water system is not in use for several weeks, a quantity of hydrogen gas may accumulate in the water heater. To dissipate the gas safely, please turn on the hot water taps for several minutes to ensure that gas has been properly removed from the water heater. As the air escapes, sounds may occur which is normal.
- Do not remove, cover, or damage any permanent instructions or labels from the exterior or interior of the unit panel.
- Only qualified personnel should install in accordance with the Plumbing Code of Australia (PCA) local and national regulations and this guide. Improper installation may cause water leakage, electric shock, or fire alarm.
- Do not insert fingers, rods or other objects into the air inlet or outlet. The fan is rotating at high speed, which may cause injury. Do not use flammable sprays, such as hairspray or paint near the machine to avoid fire.
- Your heat pump contains electrical components. Do not dispose of electrical appliances as unsorted municipal waste, a separate collection facility should be used. Contact your local government to find out information about the collection system. If electrical appliances are disposed of in landfills or dump sites, hazardous substances can seep into groundwater and cause health problems.
- The unit must be fixed firmly, otherwise noise and vibration may be generated. Ensure there are no obstacles around the device. In places with strong wind (such as seaside areas), the unit should be installed in a windproof place.
- The pressure release valve (PTR) should be opened every 6 months to ensure that the valve does not have any restrictions. The drainpipe should be well insulated to prevent the water in the pipe from freezing in cold weather.



- Before cleaning, be sure to stop operation and isolate the unit (i.e.. turn off the isolating switch or circuit breaker), otherwise, electric shock or injury may occur.
- Water temperature over 50 degrees Celsius will cause severe burns and even death.
- Children, the disabled and the elderly are at highest risk of burns. Feel the water temperature with your hands before showering or taking a bath to avoid burns.
- To avoid an electric shock, do not operate the machine with wet hands. The ground electrode must be well grounded. Make sure all electrical sockets and plugs are dry and tightly connected. This unit requires reliable earthing.
- A one-way check valve and a suitable isolation valve must be installed on the water inlet side.
- It is normal for the (PTR) to release some water during operation. However, if there is a large amount of water, please contact our service team. Improper drainage can cause water damage to surrounding areas such as buildings, furniture, etc.
- Except for repair and maintenance purposes, do not turn off the power, especially in cold weather as it may freeze the machine. Continuously powered heating water is necessary.
- Do not puncture the water heater casing, smoke, or activate sparking of any description within 1.5 meters of this water heater.
- Compliance with national gas regulations should be observed. This water heater contains flammable propane refrigeration in a sealed closed refrigeration circuit.
- We recommend keeping children away from the Heat Pump.
- Under no circumstances should "home craft" type modifications be attempted. This appliance is not intended for use by persons (including children) with reduced physical sensory or intellectual abilities, or who lack the experience and knowledge to safely use this appliance without supervision or instruction. Children should be supervised by a responsible person to ensure their safety.
- All electrical connections must comply with the requirements of the local power company, and this guide. Do not use rated fuse, otherwise it may malfunction and cause electrical fire.
- RCBO circuit breaker must be installed.

WARNING



2. Installation cautions

PLUMBING

Care must be taken to ensure the system is installed in accordance with AS/NZS 2712 and to AS/NZS 60335.2.40:2019 - with household and similar electrical appliances.

The ECONOVA® ECON-215FREC-W Model uses natural refrigerant alternative R290 (propane).

Since heat pump water heaters can generate water temperatures more than +50 degrees Celsius, regulations require that a regulating valve be installed on the hot water outlet line of the water heater to prevent the water temperature from exceeding a pre-set safety upper limit.

The installation must conform with the Plumbing Code of Australia (PCA), regulations of the local authority, in line with national building regulations and local occupational health and safety regulations. Only licensed professionals will issue a certificate of compliance, certifying that the work in question meets all relevant standards, and only licensed professionals will take out craft insurance. The water heater must be maintained in accordance with this manual and Installation Instructions.

CUSTOM INSTALLATION

Please consult with ECONOVA® about internal installations. If a safety tray is required to prevent building damage, construction, installation and draining of a safe tray must comply with AS/NZS 3500.4 and all local codes and regulatory authority requirements.

Ensure that the heat pump unit is installed in a compliant and accessible location is crucial for maintaining its warranty and ensuring efficient service. Please refer to the installation guidelines in this manual for detailed information on compliant installation practices.

DISPOSAL

Please note, the tank and heat pump must have the natural gas released, before the units are sent to metal recycling, or to your local council appliance recycling centre.

CIRCUIT BREAKER

The hot water pump power supply must be protected by a separate RCBO on the main power switchboard and rated to suit the size of the components. Do not connect other appliances, especially high-power appliances, to the main power supply of the water heater, to ensure it operates without interference.

These models MUST be installed on their own dedicated circuit to avoid overloading and ensure proper operation

CONDENSATION DRAIN

The heat pump must be installed on a flat dry surface. If there is no special drainage pipe (sink), be sure to ensure that the condensed water flowing on the ground can be drained smoothly to avoid water pooling around the heat pump. As condensate will otherwise drip from the appliance onto the floor if the drainpipe is not added.

P&T VALVE DRAIN LINE

A drain line from a relief valve must comply with the requirements of AS/NZS 3500.4. The outlet of a drain line must be easily seen, and arranged so discharge will not cause injury, damage, or nuisance. Drains from the water heater must be directed away from the building, fall continuously, discharge water away from the operator during the operation of the valve, and PTR drains must use copper piping.

GROUND CONNECTIONS

Proper ground connection is essential.

The presence of water in the piping and water heater does not provide sufficient conduction for a ground. Non-metallic piping, dielectric unions, flexible connectors plumbing etc., can cause the water heater to be electrically isolated.

WARNING-THIS APPLIANCE MAY DELIVER WATER AT HIGH TEMPERATURE. REFER TO THE PLUMBING CODE OF AUSTRALIA(PCA), LOCAL REQUIREMENTS AND INSTALLATION INSTRUCTIONS TO DETERMINE IF ADDITIONAL DELIVERY TEMPERATURE CONTROL IS REQUIRED.

Plumbing must be well insulated. Lagging must be applied to pipes and valves for at least the first 500 mm in all directions, including PTR drainpipes. Customer should consider investing in best practice plumbing to have external hot water pipework to the primary kitchen sink lagged. As every home is different pipework plumbing insulation in the home is quoted separately.

All installations of ECONOVA® Heat Pump systems must comply with the AS3000 electrical standards. It is the responsibility of the licensed electrician to ensure that all wiring, power supply connections, and protective devices adhere to these regulations to guarantee safe and effective operation.

3. Pre-Installation

REQUIREMENT: When choosing a suitable location, the following factors should be considered:

- Ensure that there is enough space for installation and future maintenance. Do not install the heat pump in an area that is not easily accessible for maintenance and repair work. This includes installations in confined spaces, locations requiring special equipment to access, or areas that pose a safety risk to our technicians.

The inlet and outlet should be free of obstacles and strong winds.

The bottom surface should be flat and capable of bearing the weight of the heat pump, while ensuring that no noise and/or vibration will be increased.

Secure the device to help avoid unnecessary noise and/or vibration. The outdoor unit (Heat Pump) is installed with a 25mm high rubber shockproof, and it is firmly fixed with studs to avoid noise when the machine is running.

The running noise and the exhausted airflow should not affect other people. Take care to consider the location of bedrooms and noise sensitive areas.

Unsafe Installation location: Installation must comply with safety standards and regulations. Including, and not limited to, areas with inadequate ventilation, proximity to hazardous materials, or installations that violate manufacturer guidelines.


Installations indoors are not recommended, and permission must be secured from ECONOVA®.

Ensure that the electrical insulation complies with the relevant local standards.

Do not install in areas where acidic or alkaline gases are present. Make sure there is no flammable gas nearby.


TRANSPORT: When shipping this item, the following rules must be followed:

When moving, do not make the fuselage deviate from the vertical angle by more than 25 Degrees. Keep vertical. To avoid scratches or damage, please use protective covering where applicable. Since the heat pump is heavy, it needs two or more people to carry it, to avoid injury and/or damage.



Since the machine is heavy, it will need two or more people to carry it, to avoid injury and/or damage.

Do not install in areas with pH & chlorides outside the range listed here (pH 6 to 10) & Chloride >200):

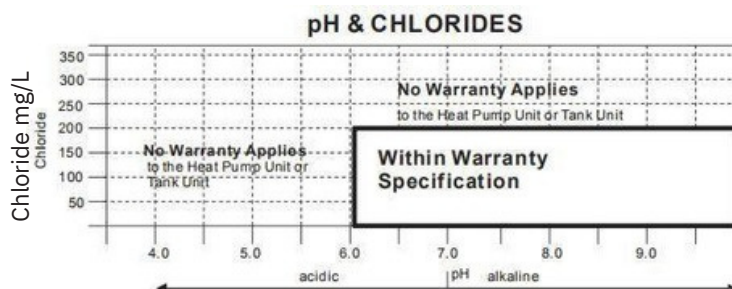

QUICK CONNECT INSTALLATION


Quick connects ③ ④ are already welded to the tank and filled with refrigerant.

Please choose a correct position before connecting the copper condenser pipes.

Make sure the connector (male) is connected to the connector (female). Please use a hexagon spanner to open-up the refrigerant valve.

Please check and make sure there is no refrigerant leak.

- 1 and 2 - Cover
- 3 - 9.52 Ø copper tube (2m)
- 4 - 6.35 Ø copper tube (2m)
- 5 - Connector (female) 1/4
- 6 - Connector (female) 3/8
- 7 - Connector (male) 1/4
- 8 - Connector (male) 3/8
- 9 - Hexagon spanner

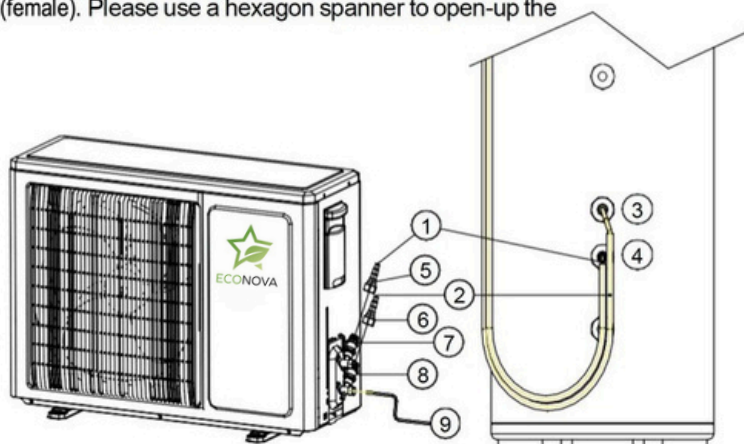

Plumbers – Best Practice is required please conduct the following check list before you finish and ensure that Valves easily accessible and all drainage doesn't damage buildings.

4. Installation

PIPING CONNECTIONS

The cold water inlet and hot water outlets are 3/4" (20mm) female connections.

The outlet of the PTR valve is a 1/2" (16 mm) female fitting.


During the use of the machine, a small amount of water will leak out at the outlet of PTR Valve, which is normal, but drainage treatment must be done regardless and must comply with AS/NZS3500.4.



WARNING

- Do not disassemble the PTR valve.
- Do not block the condensate drain line.

- 1 Cold Water Supply Outlet (20mm female thread)
- 2 Connecting Pipe
- 3 Water Temperature Sensor (Middle)
- 4 Water Temperature Sensor (upper)
- 5 Hot Water Supply Outlet (20mm female thread)
- 6 PTR Relief Valve (15mm female) Max working pressure (850kPa)
- 7 Isolation Valve
- 8 Pressure Reduction Valve (500kPa)
- 9 One-way Valve (non-return)
- 10 Tempering Valve
- 11 Booster element

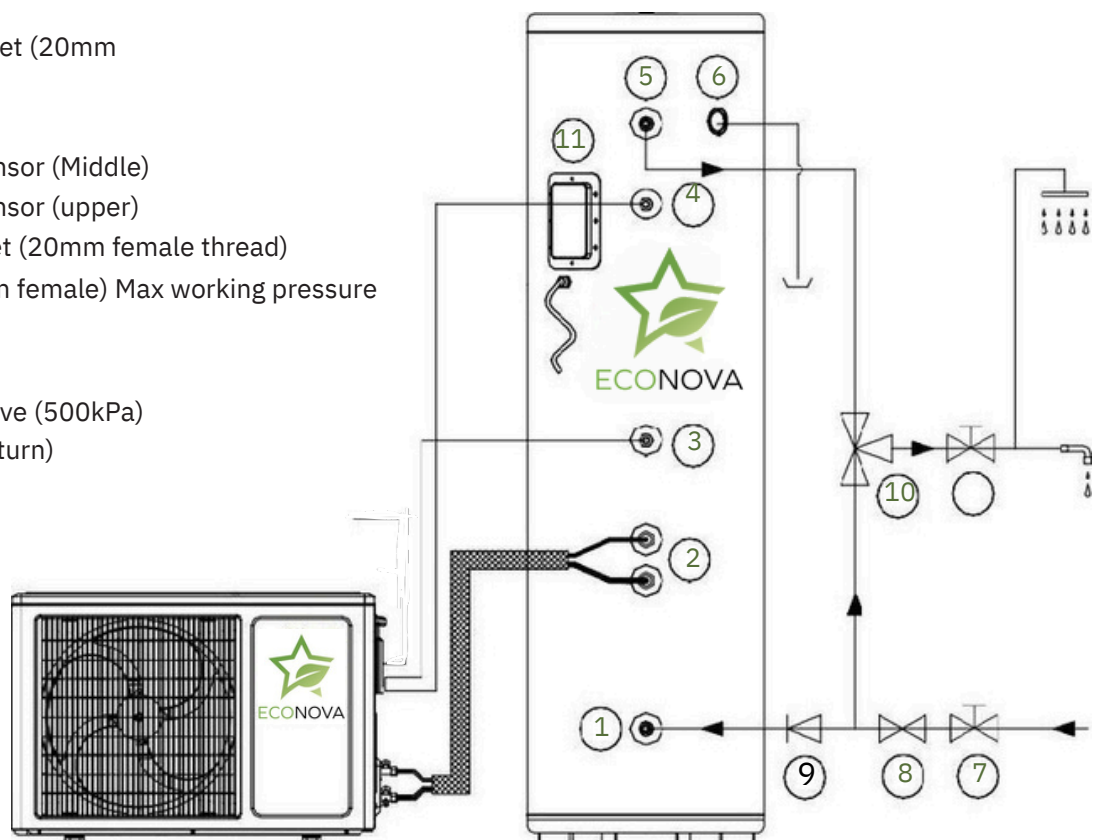

CAUTIONS

A minimum water supply pressure of 200kPa is required to assure the effective operation of this water heater.

Be careful when the heat pump is operating. If there is water flowing out, it is considered that the PTR Valve is in normal use otherwise, the PTR Valve needs to be replaced (be careful of burns).



All piping must be insulated for at least the first 500 mm, and compliant to the Australian plumbing code and Standard AS/NZS 3500.4:2021,

This water heater is designed for direct connection to mains water supply.

If the water inlet pressure is less than 200 kPa, a booster pump should be installed at the water inlet. Ensure that the thin sensor cable wires and neatly secured.


If the water inlet pressure exceeds 500 kPa, a pressure reducing valve is to be installed on the water inlet pipe.

4. Installation

HEAT PUMP UNIT INSTALL POSITION

The bottom surface for the Tank and Heat Pump should be dry and flat, and capable of bearing three times the weight of the Tank and Heat Pump

Install as per diagrams ensuring adequate air circulation and 100mm to 300mm space behind the unit outside and the wall. Do not obstruct in front of the air outlet, as this will affect the smooth air circulation. You should also avoid the windward direction.

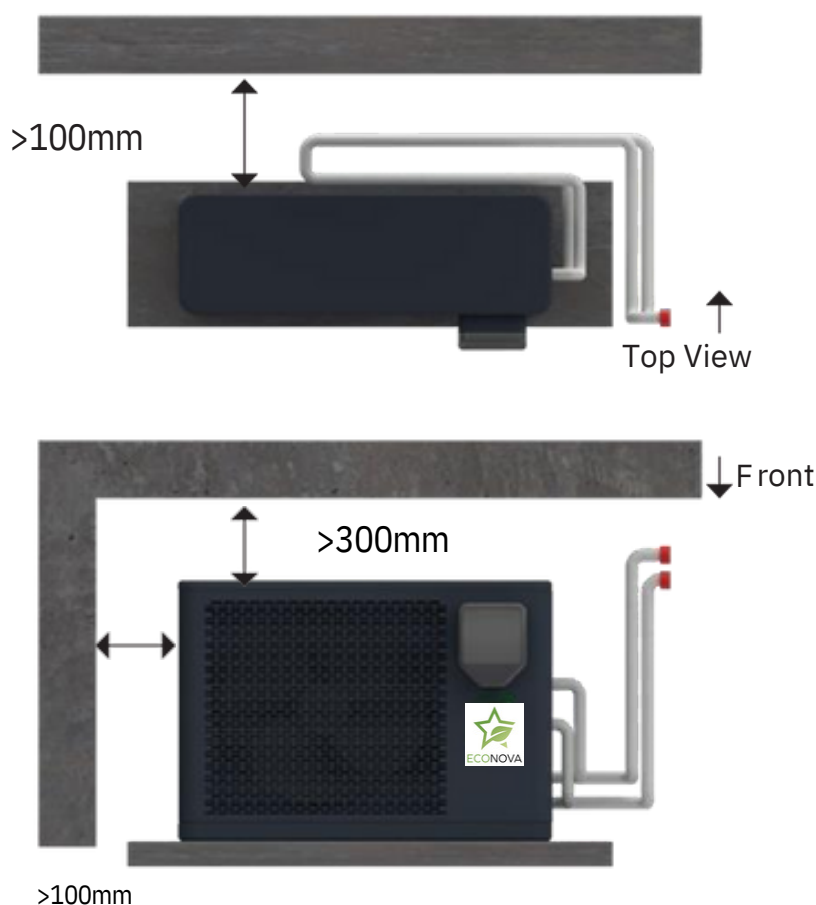

WATER TANK INSTALL POSITION

The water storage tank must be placed upright on the ground, with a 10cm foot pad under it. The installation site must have a solid foundation and must be able to withstand a weight of more than 500kg.

The hot water tank must not be mounted on the wall.

5. Operation

PREPARATION BEFORE OPERATION

Operation without water in the water tank may cause the water heater to enter a protection state, which may damage components in severe cases. In the event of such damage, the manufacturer will not be responsible for any damage caused by this issue. Before trial operation, please follow the steps. Note, Trial run must be done after all installations are complete.

POWER CONNECTION CAUTIONS

Before turning on the power to the unit, double-check that the water tank is full of water.

Do not change the set water temperature, this heater will self-adjust and heating the stored water to target temperature.

After confirming that the power cord is firmly connected, turn on the power of the water heater. The device is fully automatic control.

No need to operate the display, the display is in the power-on state by default. The device has a three-minute delay start function, please be patient.

After running for 30 minutes, observe the running status, if there is any problem, please check the display. If there is a fault code displayed on the screen contact ECONOVA®.

RUNNING DYNAMICS

There are different heating times at different ambient temperatures.

Typically, lower ambient temperatures result in longer heat times and therefore performance.

PRODUCTION METHOD (SELF-PROTECTION)

When the self-protection mode is activated, the system will stop and start self-checking. It will instigate operations to resolve the error and when resolved, the unit will restart.

The error code will be displayed on the screen until the error is resolved. The device can enter self-protection mode under various conditions, including but not limited to:

- Blocked air inlet or outlet the evaporator is covered with too much dust.
- The unit receives incorrect power (over the 220-240v range).

REFRIGERATION ADDITION

Please contact ECONOVA® for instructions and approval. Only use R290 natural refrigerant.

INSTALLATION CHECK LIST:

Piping and wiring are correct
Plumbing installed correctly
The power supply voltage is consistent with the rated voltage of the unit
The air inlet and outlet of the unit are barrier-free

6. System Maintenance

Evaporator Maintenance and Safety Notice

The efficiency of the heat pump is directly affected by the cleanliness of the evaporator. Dust, mud, or other debris on the evaporator surface can block airflow, reducing the effectiveness of heat exchange with the surrounding air. This results in diminished heating efficiency and increased strain on the unit.

To maintain optimal performance, customers must ensure the heat pump remains clean and free from obstructions at all times.

Important Safety Warning:

****DO NOT USE FLAMMABLE CLEANING PRODUCTS**** to clean your heat pump.

If you notice a buildup of grime or debris on the evaporator, please ****do not attempt to clean it yourself****. Contact ****ECONOVA**** to arrange a professional maintenance visit. Our trained technicians will ensure safe and proper cleaning to protect your system and uphold warranty conditions.



Before cleaning



After cleaning

Routine Inspection and Maintenance Guidelines

Please inspect the unit regularly for any visible signs of damage. If any damage is detected, contact our maintenance team immediately for assistance.

In regions where temperatures fall below 0°C, and if the system will be inactive for an extended period, it is essential to drain all water from the tank. This will prevent potential ice formation inside the cylinder, which can cause serious damage.

Anode Maintenance

Your water heater is equipped with a sacrificial anode to protect the cylinder from corrosion. Over time, this anode will wear out. We recommend replacing the anode during your five-year service interval—or sooner if you reside in an area with poor water quality.

Technician Safety and Repair Protocols

All repair work must be conducted under controlled procedures to minimize risks associated with flammable gases or vapors during operation.

Technicians and maintenance personnel must be fully aware of the repair requirements and the working environment. Avoid conducting work in confined or sealed spaces. The repair area should be properly isolated and free from combustible materials to maintain a safe working condition. Ensure that all technical staff are aware of the potential for refrigerant gas leaks.

PRESSURE & TEMPERATURE RELIEF (PTR) VALVE MAINTENANCE

To prevent excessive pressure buildup within the water tank—which may lead to tank deformation or reduce its service life—the Pressure and Temperature Relief (PTR) valve must be maintained in working order.

Locate the PTR valve on the unit. Carefully lift the lever to manually activate the valve, allowing a small amount of water to discharge. This process confirms that the valve is functioning correctly by relieving internal tank pressure as intended.

If water flows freely, the valve is operational. If water does not discharge or the valve appears stuck or blocked, it may be faulty and must be replaced immediately.

Homeowner Responsibility

It is strongly recommended that homeowners perform regular checks on the PTR valve—ideally every six months—as outlined in AS/NZS 3500.4. Routine activation of the valve helps prevent mineral build-up and ensures the system remains compliant and safe.

Failure of the PTR valve to operate correctly can result in uncontrolled internal pressure, posing significant risk to both the system and property.

If the valve is not functioning or requires replacement, please contact your licensed plumber or our Ecogenica service team for assistance. Only licensed tradespeople should perform replacements or adjustments to the PTR valve.



DRAINING THE TANK

If the tank is to be replaced, ensure the site is appropriate for safe drainage. Draining can be performed by connecting a hose to the cold water inlet and running it to a suitable drain point. To prevent the formation of a partial vacuum during draining, it is necessary to disconnect the hot water outlet or open the Pressure and Temperature Relief (PTR) valve.

Ensure that the drain line is positioned to safely discharge water away from the operator while the valve is open. All procedures must comply with *AS/NZS 3500.4:2021, Section 5.11*.

REFRIGERATION REPAIRS

All refrigeration leak detection must be performed using equipment certified for R290 (flammable refrigerant). The leak detector must be suitable for use with flammable gases and must not generate sparks.

Prior to beginning work and throughout the process, use an appropriate detector to check for refrigerant leaks. Only trained and qualified personnel should carry out any refrigerant handling or repair tasks.

WARNING – HOT WATER RISK

This appliance may deliver water at high temperatures. Always refer to the *Plumbing Code of Australia (PCA)*, local regulations, and the installation instructions to determine whether additional delivery temperature control is required. Failure to do so may result in scalding or other safety hazards.

Specifications

Model	ECON-215FREC-W
Hot Water Capacity	215 Litres
Heating Capacity Watts	3150
Maximum input current (A)	20
Rapid Boost Element (KW)	3.6
RCBO Current Rating (A)	20
Refrigerant	R290
Type of electric control	Fixed Frequency
Operating temperature	-7°C~+43°C
COP (approx,W/W)	5
Tank Dimension(mm)	φ510*1800
Heat Pump Dimension (mm)	780*260*545
PTR (kPa)	850
Min/Max Rated Pressure (kPa)	200 ~ 500

All listed specifications are measured at inlet water temperature +14°C; Dry Bulb Temperature +19°C, wet bulb temperature 15°C, and hot water set point 55°C . Recovery rates vary with environmental conditions.

This water heater features fully welded enamel tank meeting the design requirements: AS/NZS 2712 and AS/NZS 60335.2.40



This water heater complies with AS 3498 and AS/NZS 1677.2

*Hot water temperature is limited to 68°C

**Reducer to 20mm / G ¾ available on 330 model..

Drawings

ECON-215FREC-W

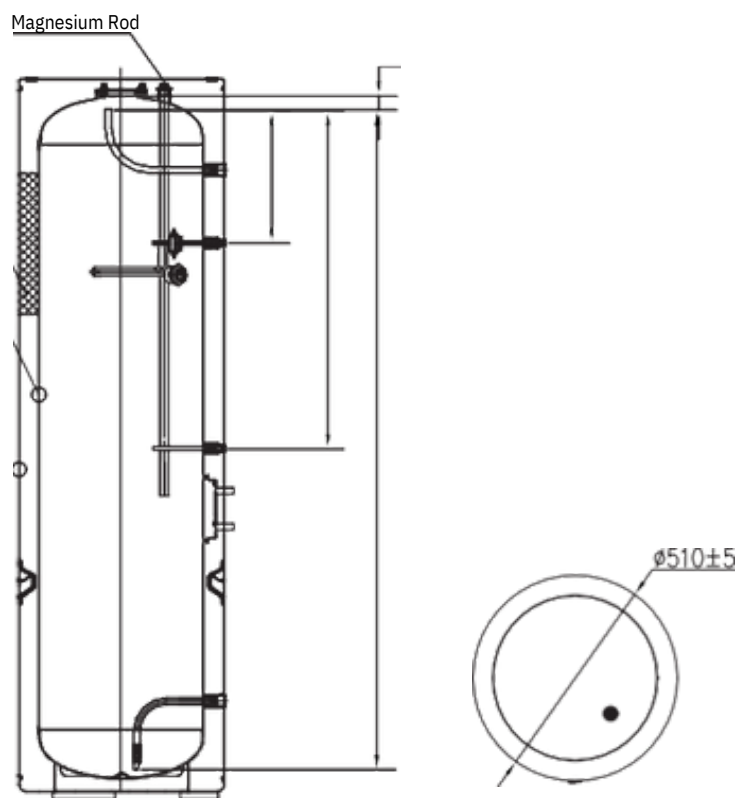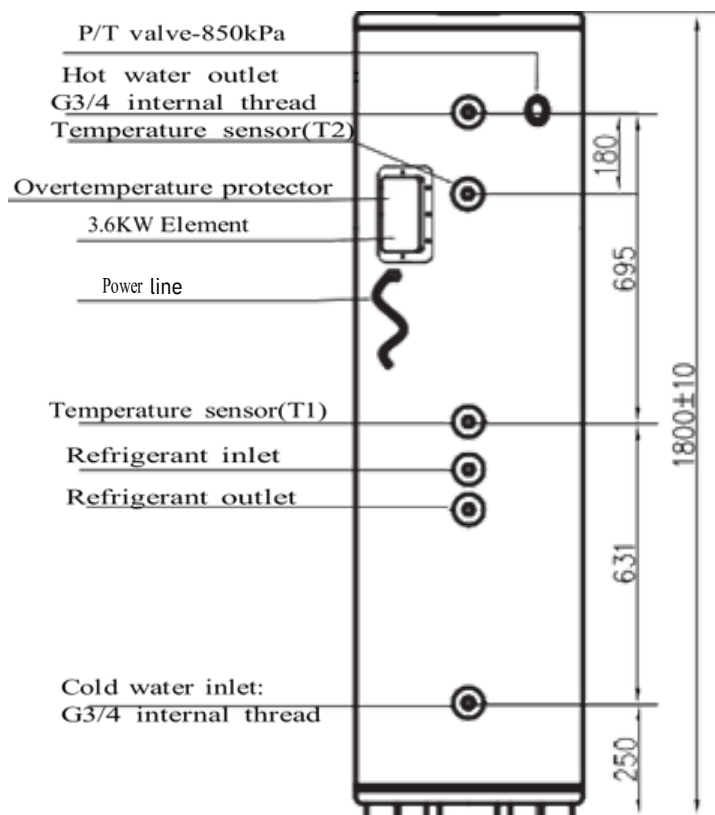


Drawings

ECON-215FREC-W Exploded View

**WARNING DO NOT
OPEN**


Only ECONOVA® or licensed
tradesperson can open this unit.

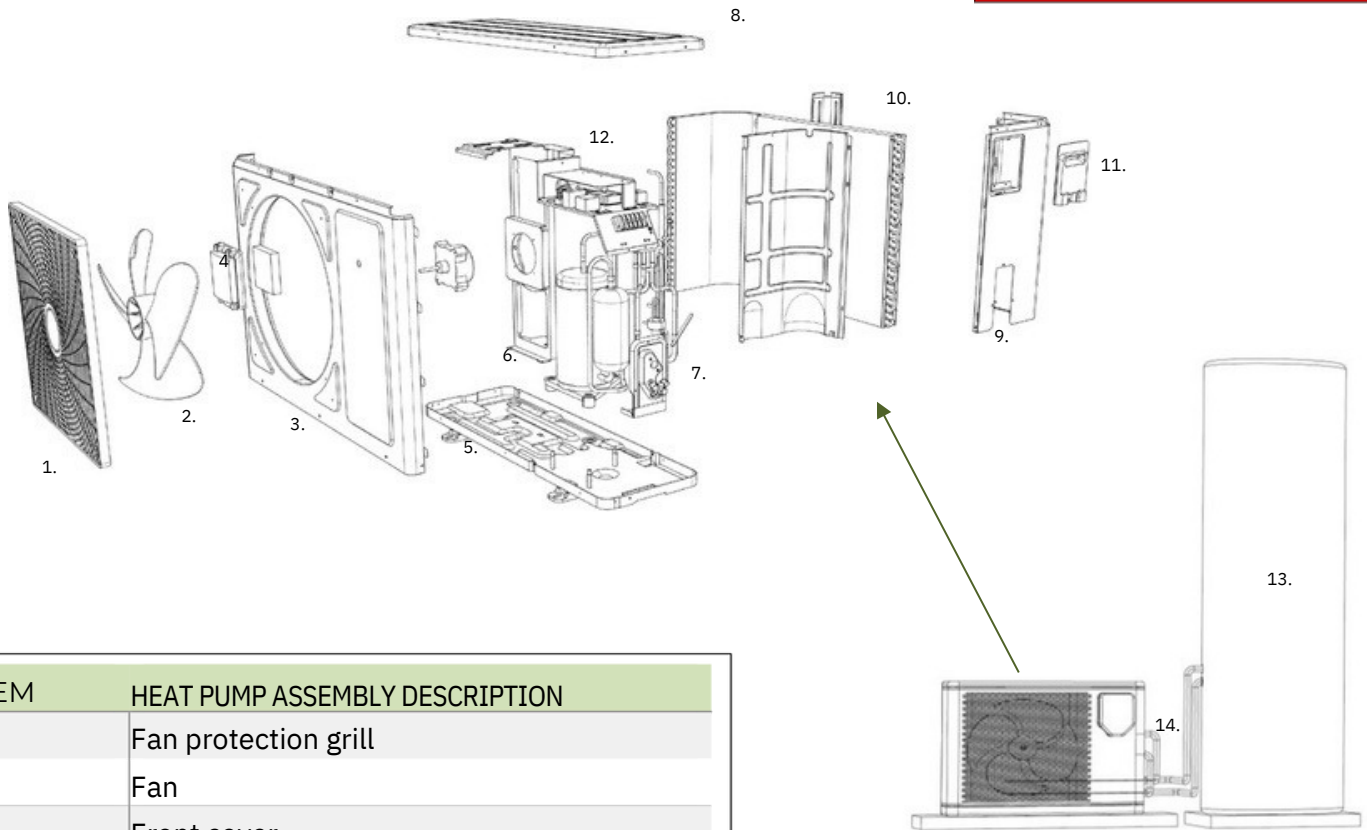


ITEM	HEAT PUMP ASSEMBLY DESCRIPTION
1	Fan protection grill
2	Fan
3	Front cover
4	Controller
5	Condensation drain
6	Compressor assembly
7	Schrader valve & Quick condenser connection
8	Top cover
9	Rear casing assembly
10	Evaporator
11	Power cable cover
12	Circuit board
13	Condenser tank
14	Condenser pipe (pair coil)








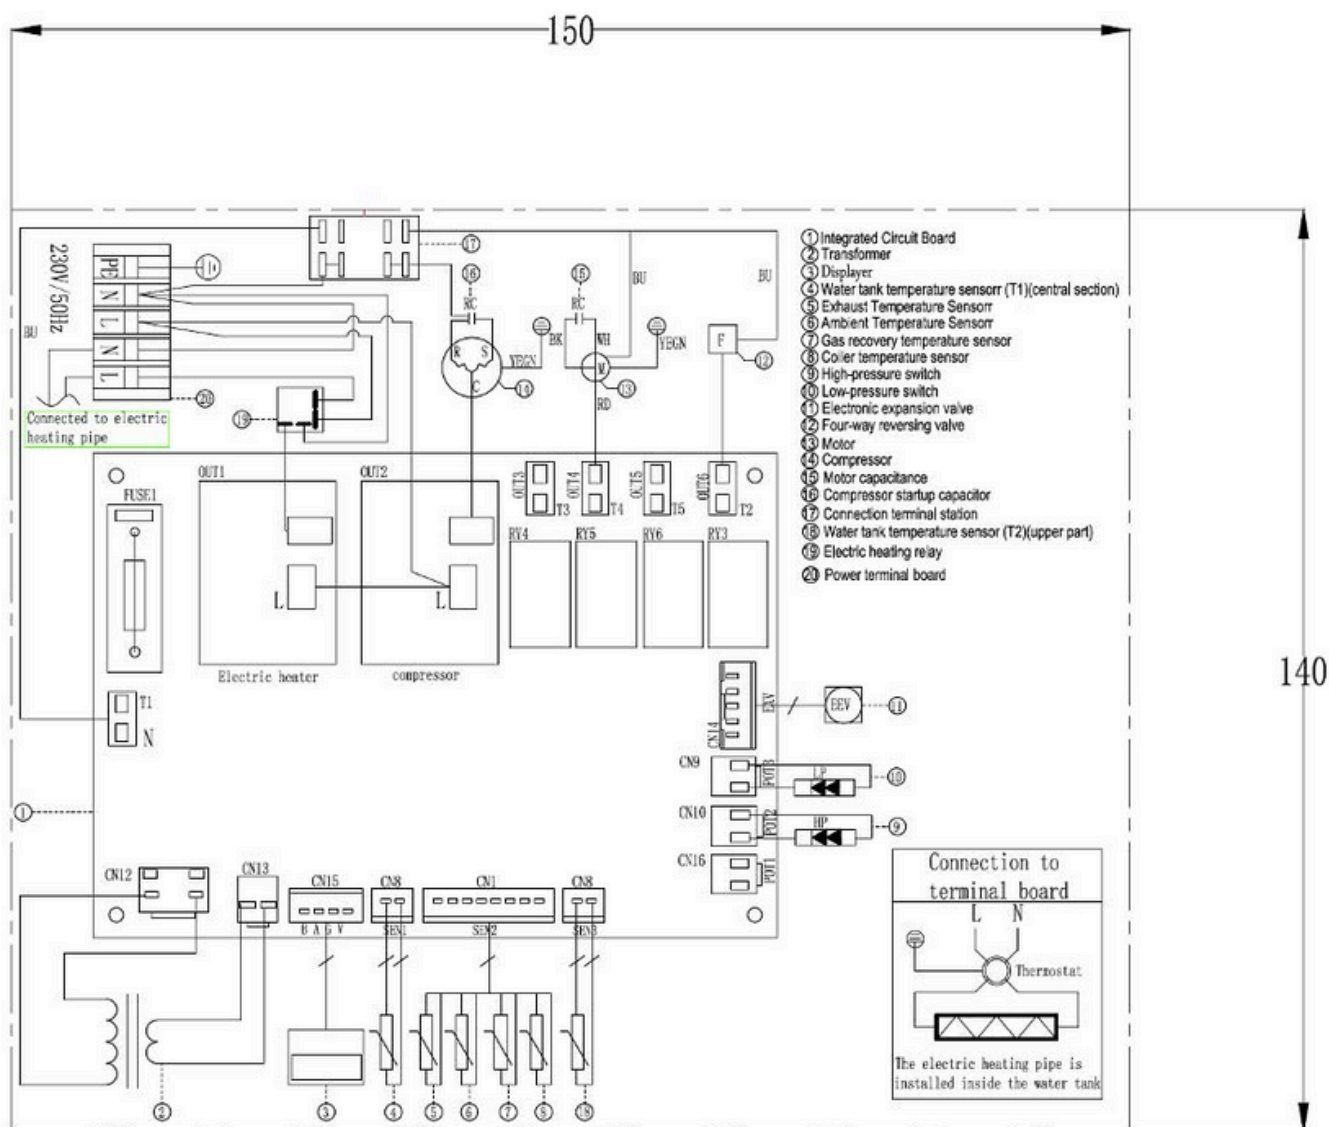



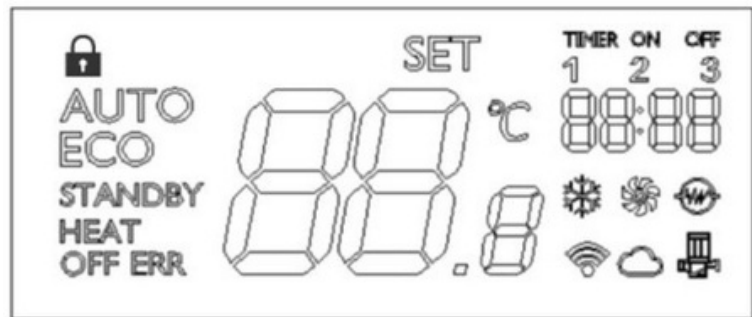



8. Electrical & Controls



8. Electrical & Controls



1	AUTO Automatic Mode	All-day operation. Press  in “Automatic Mode” to switch to “Eco mode”
2	ECO Energy saving mode	Run in a fixed period. Press  in “Eco Mode” to switch to “Automatic Mode”
3	STANDBY	When the machine is in the standby state, the “STANDBY” icon is on
4	HEAT	When the machine is in the heat state, the “HEAT” icon is on
5	OFF	Long press the  for 3 seconds to power on (power off). When the machine is in the off state, the icon is on
6	ERR (Fault alarm)	When the machine fails, the icon is on. The fault type can be queried according to the fault alarm codes
7		Lock: (this function is blocked) Lock if no button is pressed in 60s, and press any button to unlock
8		The icon is on when the defrosting function is started
9		Fan on: when the fan is on, the  icon is on
10		Compressor on
11		Electrical heating on: when the electrical heating is on, the  icon is on
12		Wire controller WIFI: Long press  to enter the distribution network
13		Remote control: Connected to the cloud

8. Electrical & Controls

Connecting Your Heat Pump to the EcogenSmart App

Follow these instructions to connect your heat pump to the app for seamless operation and control:

1. Download the EcogenSmart App (pictured, right)

The app is available on both the App Store (iOS) and Google Play (Android).

Search for the app, download, and install it on your device.

2. Create an Account

Open the app and create an account using your email address and a password of your choice.

Check your email for a verification code, which you'll need to complete the account setup.

3. Add Your Heat Pump

Once logged in, tap the home icon located at the bottom left of the app screen.

Select the + icon at the top right-hand side of the screen.

Choose the option to Add Device.

4. Detect the Heat Pump

The app will automatically detect your heat pump.

5. Connect to Your Wi-Fi









Follow the prompts to connect the app to your home Wi-Fi network.

Enter your Wi-Fi credentials when prompted.












6. Finalize Connection

Once the Wi-Fi connection is established, the app will successfully link to your heat pump.




1		On/Off: •Long press  for 3 seconds to turn on (off)
2		Set temperate: •Press  or  to view the temperature set.
3		Set working mode: •Press  to release and switch between “Automatic mode” and “Eco-mode”. Under the “Eco-mode”, run according to the working period set (It is valid after the key is released).
4		Set time: •Press  to enter the time setting. The time adjustment shall be as follows: Hour → Clock → Exit setting •Press  and  to adjust the corresponding time value •Exit automatically if no key is pressed within 30 seconds •Press  to exit during setting

8. Electrical & Controls

5		<p>Setting the Timer on Your Heat Pump - the controller is mounted in weather proof casing on the Heat Pump.</p> <ol style="list-style-type: none"> 1. Press and hold the clock icon for 5 seconds until ""Timer 1"" appears on the display. 2. Use the ""+"" and ""-"" buttons to set the desired ""on"" time for Timer 1, then press the clock icon again until ""Timer 1 off"" appears. Use the ""+"" and ""-"" buttons to set your desired ""off"" time. 3. If you wish to set additional timers, repeat this process for Timer 2 and Timer 3. 3.4. If you only need one on/off cycle, make sure to zero out Timers 2 and 3 using the ""+"" and ""-"" buttons. 5. Once all timers are set, press the ""M"" icon to activate ECO mode. This will run the unit according to your selected timer settings.
6		<p>Factory parameter setting (RST):</p> <ul style="list-style-type: none"> • Press “Reset (RST)” for three times continuously to enter the factory parameter setting. The parameter adjustment mode is the same as that of “Advanced setting”. The parameter adjustment mode will fix factory parameters.
7		<p>Parameters restore to factory default parameters (RST):</p> <ul style="list-style-type: none"> • Under the non-set state, long press “Reset (RST)” for more than 4 seconds to display “dEF”, at this time, press  to restore the current parameters to factory parameters.
8		<p>Manual forced defrosting:</p> <ul style="list-style-type: none"> • Long press  for 10 seconds to start defrosting forcibly and exit when the maximum defrosting time is reached or the protection fails.
9		<p>View the current value:</p> <ul style="list-style-type: none"> • Press  and  simultaneously to view the current value. It will run normally after they are released.
10		<p>Remote control: Long press  to enter the distribution network</p>

8. Electrical & Controls

Startup:

Power On: Press “”

Factory parameter setting:

Legionella Control Method

All models listed in this manual comply with AS 3498 for Legionella control. Each unit is programmed to perform a weekly disinfection cycle, during which at least 90% of the tank volume is heated to a minimum of 60°C for no less than 32 minutes.

For commercial models, the default disinfection temperature is 68°C. This cycle is automatically initiated daily at 2:00 A.M. and is controlled by the system's internal circuit board.

Important Notes:

The disinfection cycle is hard-wired into the control board and cannot be disabled or overridden. It operates independently of:

- User temperature set points
- Deadband settings (on/off activation thresholds)
- Timer configurations

	CONTENT	FAULT CODE	HEAT PUMP STATUS	NOTES
1	Freeze Protection	A11	If frosting detected, then - reverse cycle	Automatic recovery
2	Low voltage switch protection	A12	stop heating	power off then power on
3	High voltage switch protection	A13	stop heating	Automatic recovery
4	Water tank temperature sensor failure	A21	stop heating	Automatic recovery
5	Coil temperature sensor failure	A22	stop heating	Automatic recovery
6	Exhaust temperature sensor failure	A23	stop heating	Automatic recovery
7	Ambient temperature sensor failure	A25	stop heating	Automatic recovery
8	Intake air temperature sensor failure	A26	stop heating	Automatic recovery
9	Operator cable interruption protection	A51	stop heating	When the VCC and GND lines are opened, the operator does not light up; when the A and B lines are opened, the operator displays the A51 fault code
10	Exhaust temperature high temperature protection	A61	stop heating	3 times/hour the heat pump stops working

Warranty

Disclaimer: All our Heat Pump systems must be installed by a licensed and certified installer ensuring all local, state and national regulations are met. Failure to do so will void this warranty.

NOTICE TO CUSTOMER

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Note: We recommend all consumers safely store receipts, invoices, warranties, and any installation records to allow for faster processing of warranty claims.

1.1 TERMS OF WARRANTY

1. The warranty terms in this ECONOVA® Customer Product Manual relates only to the ECONOVA® Range of Heat Pump Water Heaters:
ECON-215FREC-W

The warranty period are as follows from the date of installation:

This heat pump as described in this manual comes with a 5 year system warranty on the Compressor unit and a 7 year system warranty on the Tank. Labour and plumbing and electrical fittings, including valves and GPO are covered under a 2 year consumables warranty.

After 2 years from the date of installation, Labor costs associated with diagnosis, removal of the faulty part and installation of replacement parts will solely be the owner's responsibility and solely at the owner's cost.

The benefits conferred by this Warranty are in addition to all other rights and remedies in respect of the Heat Pump Water Heater System, which the purchaser has under the law including the Competition and Consumer Act 2010 and consumer protection legislation of the States and territories. Nothing in this Warranty has the effect of excluding, restricting or modifying those rights.

2. ECONOVA® will repair or provide parts for repair or replacement, where defects arise from faulty materials.

3. ECONOVA® is responsible for reasonable costs associated with legitimate warranty claims, as determined by ECONOVA®. To determine whether a warranty claim is legitimate, ECONOVA® may send an ECONOVA® accredited service agent to inspect the product. ECONOVA® is not responsible for:

- (a) any costs that are not pre-approved in writing by ECONOVA®; and
- (b) any costs associated with a product which is determined upon inspection not to be covered by this warranty.

Any reasonable costs incurred by the consumer that is associated with making a legitimate warranty claim will be reimbursed by ECONOVA®. Inquiries relating to warranty coverage and claims for ECONOVA® products or services must be made by contacting ECONOVA®.

An ECONOVA® accredited service agent or the ECONOVA® service department can repair or replace product components, subject to ECONOVA® terms and conditions of warranty. ECONOVA® can, in addition, provide information on operation and maintenance of ECONOVA® products. ECONOVA® contact details are on the back of this document.

1.2 WARRANTY CONDITIONS

1. The person making the claim must be the owner of the Product or have written authorisation to act on behalf of the owner which must be provided to ECONOVA®.

2. The person making the claim must notify ECONOVA® as soon as they notice any defects without delay, and the product must be within its warranty period as set out in the terms of warranty.

3. The warranty applies to products manufactured on or after the date of publication of this warranty.

4. The terms of warranty take effect from the date of completion of installation of the Product and full payment of the Product. ECONOVA® reserves the right to request proof of purchase or a copy of the certificate of compliance (this is required by law to be issued by the installer) to verify the date of completion of installation prior to commencing any warranty work. Where the date of completion of installation is not known, then this warranty will commence 2 months after the date of manufacture. The date of manufacture is stated on the data plate of the appliance.

5. Prior to any inspection, service, repair or replacement undertaken pursuant to the warranty on a Heat Pump Water Heater System, the following must occur:
a. The warranty works must be authorised by ECONOVA®; and
b. Proof of purchase and the certificate of compliance must be submitted to ECONOVA®.

6. The Heat Pump Water Heater System must be installed, commissioned, serviced, repaired and removed in accordance with the installation instructions supplied by ECONOVA® for the Heat Pump Water Heater System, and in accordance with all relevant statutory and local requirements of the state/province/ municipality in which the Heat Pump Water Heater System is installed.

7. All Heat Pump Water Heater Systems must be operated and maintained in accordance with the ECONOVA® operating instructions.

Warranty

8. The warranty only applies to the Heat Pump Water Heater System and original or genuine (company) component replacement parts provided by ECONOVA®. The warranty does not cover any plumbing or electrical parts supplied by the installer and that is not an integral part of the Heat Pump Water Heater System. Such parts would include, but is not limited to, pressure regulating valve, limiting valves, check valves, tempering valves, electrical switches or fuses.

9. To the extent permitted by law, ECONOVA® shall not be liable under this Warranty for any consequential loss or damage or any incidental expenses resulting from any breach of this warranty, including but not limited to, claims for damage to buildings, roofs, ceilings, walls, foundations, gardens, personal belonging or household effects, fixtures and fittings, or any other consequential loss, damage or inconvenience, either directly or indirectly due to the Heat Pump Water Heater System or component(s) related to the system or its operation including but not limited to leakage.

10. Where a failed component or Heat Pump Water Heater System is replaced under warranty, the balance of the original warranty period will remain effective. The replaced part or Heat Pump Water Heater System does not carry a new warranty.

11. ECONOVA® reserve the right to have the installed product returned to the factory for inspection.

12. Products eligible for repair may be replaced by refurbished goods of same type rather than being repaired. Refurbished parts may be used to repair/replace the Products.

13. Where the Heat Pump Water Heater System is not installed in accordance with the installation instructions or installed in a position that does not allow safe, ready access as determined by the attending service person, the service may be refused at their discretion. Any cost to access the site safely, including the cost of additional materials, handling and/or safety equipment, will be charged to the consumer and will be the consumer's responsibility.

14. The Heat Pump Water Heater System must be sized to supply the hot water demand in accordance with the guidelines in the Heat Pump Water Heater System Literature.

1.3 WARRANTY EXCLUSIONS

Products supplied by ECONOVA® are subject to warranties that cannot be excluded by law. Any breach of condition or warranty is limited to the repair or replacement of the Product, the supply of an equivalent Product, the payment of the cost of repairing or replacing the Product or acquiring an equivalent as determined by ECONOVA®.

Repair and replacement work will be carried out as set out in the Heat Pump Water Heater System terms of warranty. However, the following exclusions may void the warranty and may incur additional service charges and/or cost of parts:

15. Damage to the Heat Pump Water Heater System or any component, including accidental damage, natural disasters, acts of God, storm damage, vandalism.

16. Failure due to abuse, misuse or neglect, improper maintenance, or failure to maintain and incorrect or unauthorised installations.

17. Failure or damage caused by alterations, service or repair work carried out by persons other than ECONOVA® accredited service agents or the ECONOVA® service department.

18. Where no fault is found with the Heat Pump Water Heater System or its components and the issue is related to the plumbing installation or is due to a direct or indirect failure of water, electric or gas supplies, corrosive atmosphere or other issues not caused by a fault of the Product including but not limited to:

- (a) excessive discharge from the temperature and/or the pressure relief valve due to high water pressure.
- (b) excessive water pressure.
- (c) no flow of hot water.
- (d) water leakage.
- (e) where the supply of electricity or water does not comply with relevant codes or acts, or the power supply is cut;
- (f) the overflow vent drain has not been installed or it is blocked or corroded.
- (g) rust due to a corrosive atmosphere.

19. Where the unit fails to operate or fails because of excessive cold or ice formation in the piping to or from the Heat Pump Water Heater System.

20. Where any faults arise from connecting to a water source that is unfiltered such as dams, bores, rivers etc.

21. The Heat Pump Water Heater System being relocated from its original point of installation.

22. Operating the water heater and components when not filled with water.

23. This warranty applies to Heat Pump Water Heater Systems connected to the energy source listed on the data label of the Product.

24. This warranty does not apply to damage caused by sludge and/or sediment in the water supply.

25. Repair and/or replacement of the Heat Pump Water Heater System due to scale formation above 200ppm. (water hardness) in the waterways or the effects of either corrosive water or water with a high chloride or low PH level when the water heater.

26. Where the ECONOVA® Heat Pump Water Heater System is in a position that does not comply with the Heat Pump Water Heater System installation instructions or relevant statutory requirements, causing the need to dismantle or remove cupboards, doors, or walls, or require the use of special equipment to bring the Heat Pump Water Heater System to floor or ground level or to a serviceable position. 27. Labour costs incurred due to an ECONOVA® accredited service agent performing checks which should have been carried out by the consumer in accordance with the operating instructions and where no defect is found.



Water heating is the largest single source of green house emissions accounting for almost a quarter of household energy use.

Your new ECONOVA® heat pump uses a small amount of energy to move heat from one location to another. Heat is absorbed by ozone-friendly R290, a natural refrigerant **which does not contribute to global warming.**



ECONOVA®

A smart choice for the environment, a smart choice for you

We support the Australian Government in its commitment to transforming our energy supply system into one that is cheap, clean and reliable.

This lays the foundation for future generations to enjoy more secure, reliable and affordable energy. You can choose an ECONOVA® product safe in the knowledge that our innovative technology is focused on energy and environment savings.

Our hot water heat pumps are CFC free and utilise renewable energy, extracted from the air.

CALL: 1300 196 390

VISIT: econova.com.au

6 Braeside Drive, Braeside, Vic, 3195 Australia

